

TIJ
Thermal Inkjet Printer



Website: pacificbusiness.in

Email: sales@pacificbusiness.in

Mobile: +91 966-779-7876

MXPro Series

High Speed Inline Inkjet Printer



- ① Apply with OCR; Maximum 240 m/min 1200dpi.
- ② Multiple communication protocols for ERP&MES etc.
- ③ Multiple printing modes;1-4 print heads to select.
- ④ Ink monitoring and calculation.




Battery




Carton



EPE

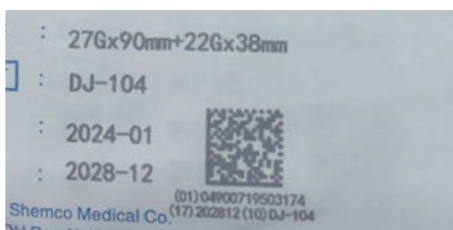

Paper Bag

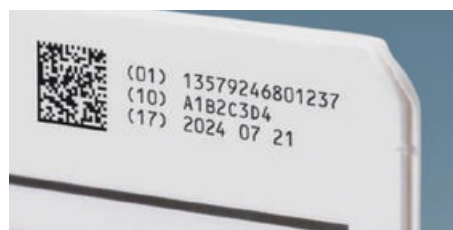

Medication Box
















Plastic Film

Parameters

Technology	HP TIJ2.5 Thermal Inkjet Technology
DPI	50~1200DPI
Print Distance	2-5 mm
Print Height	1-50.8mm (1-4 heads)
Print Speed	Maximum 240 m/min (high-speed mode)
Print Content	Date, Time, Text, Batch Number, Image, Barcode, QR Code, Database
Ink Type	Aqueous / Solvent base / UV ink
Ink Color	Black, White, Red, Yellow, Blue, Green, Invisible
Languages	Arabic, Chinese, English, French, German, Greek, Italian, Korean, Persian, Portuguese, Russian, Spanish, Thai, Turkish, etc. (support customization)
Communication Protocol	TCP/IP, RS232, Modbus-TCP
Interface	Ethernet, USB, DB9 serial port, I/O, External encoder, Photocell sensor
Working Condition	Temperature 0-45°C (the best: 20-30°C), humidity 40-60%Rh
Adapter Parameters	Input: 100-240V AC; Output: 12V/4A DC

Dimension & Accessories

Standard List			Optional Parts		
 ① Plastic Suitcase	 ③ Controller	 ⑤ Power adapter	 ① Stand bracket	 ② Alarm light	
 ② Inline mounting bracket	 ④ Print head	 ⑥ Photocell sensor	 ⑦ Communication cable	 ③ High precision adjustment component	
			 ④ Anti-shock mount	 ⑤ Spring-back holder	 ⑥ Encoder

